



MDA-10000A Slave and Master


MDA-10000A/ MDB-5000A Welding Power Supplies

The MDA-10000A and MDB-5000A are transistor welding power supplies ideal for parts requiring high peak current with ultra fast rise time.

MDA-10000A can be combined with up to 12 units for combined output current. One master controls all slaves, ensuring the same weld schedule is applied to all. Built-in feedback mode ensures stable output.

The MDB-5000A features a polarity switching function that reduces the effect of the Peltier effect and improves weld uniformity.


Current rise of transistor controlled welding power supply is faster than others

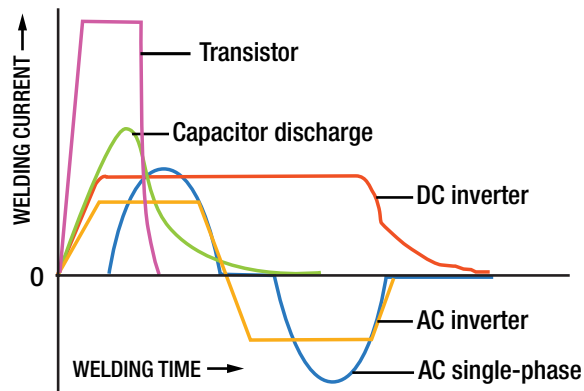

KEY FEATURES

- Integrate up to 12 units for combined output current for flexible configuration for various part sizes
- Closed loop feedback for stable output and reproducible welding results
- Control modes: Current, Voltage, Power
- Easily scalable for range of part sizes
- Fast rise time facilitates welding:
 - ◆ Automotive high strength steel with high hardness values (Usibor, etc.)
 - ◆ Conductive materials such as copper and aluminum often found in automotive battery applications

TYPICAL APPLICATIONS

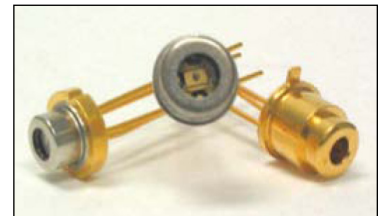

Optical sensor parts



Crystal oscillators



Projection welding of electronic components

TECHNICAL SPECIFICATIONS

Model	MDA-10000A	MDB-5000A
Type	Standard	Polarity switchable
Power requirements	Single Phase, 100 - 120 VAC or 200 - 240 VAC, 50/60HZ	
Power consumption	430 W max	
Feedback modes	Constant current / Constant voltage / Constant current and constant voltage	
Number of connectable units	0 - 11 units	1 unit
Maximum current*	10.0 kA (Master unit only)	10.0KA (One master and one slave units) Master unit of MDB-5000A cannot be used alone.
	20.0 kA (One master and one slave unit)	
	30.0 kA (One master and two slave units)	
	40.0 kA (One master and three slave units)	
	50.0 kA (One master and four slave units)	
	60.0 kA (One master and five slave units)	
	70.0 kA (One master and six slave units)	
	80.0 kA (One master and seven slave units)	
	90.0 kA (One master and eight slave units)	
	100.0 kA (One master and nine slave units)	
	110.0 kA (One master and ten slave units)	
120.0 kA (One master and eleven slave units)		
Time setting (31 schedules)	Maximum voltage	30 V
	Squeeze time	0000 - 9999 ms
	Pre-weld check	0.00 - 1.00 ms
	Upslope	0.00 - 9.99 ms
	Weld 1 / Weld 1 & 2	0.00 - 9.99 ms
	Cooltime	0.00 - 9.99 ms
	Downslope	0.00 - 9.99 ms
Hold time	0.00 - 999 ms	
Monitor display	Weld 1 & 2 (Average current/average voltage), Weld 1 & 2 (Peak current/peak voltage), Weld 1 & 2 (Average power/average resistance) Current, Voltage, Power, Resistance waveform, schedule number	

*Maximum current output is dependent on the secondary impedance.

WEIGHT & DIMENSIONS

Dimensions (L x W x H)	25.04 in x 6.85 in x 13.78 in (636 mm x 174 mm x 350 mm)
Weight	82 lbs (37 kg)



AMADA MIYACHI AMERICA, INC.

1820 S. Myrtle Ave. • Monrovia, CA 91016 US
 T: (626) 303-5676 • F: (626) 358-8048
info@amadamiyachi.com • www.amadamiyachi.com
 ISO 9001 Certified Company • 24/7 Repair Service: 1-866-751-7378

AMERICAS

AMADA MIYACHI AMERICA (Midwest Office)
 Detroit, Michigan
 T: (248) 313-3078
midwestsales@amadamiyachi.com

AMADA MIYACHI DO BRASIL LTDA.
 São Paulo, Brasil
 T: +55-11-4193-3607
antonio.ruiz@amadamiyachi.com

EUROPE

AMADA MIYACHI EUROPE GmbH
 Munich, Germany
 T: +49-89-839403-0
infode@amadamiyachi.eu

ASIA

AMADA MIYACHI CO., LTD.
 Isehara, Japan
 T: +81-4-7125-6177
sales@miyachi.com

AMADA MIYACHI KOREA CO., LTD.
 Seoul, Korea
 T: +82-31-8015-6810
dykim@mkc.miyachi.com

AMADA (THAILAND) CO., LTD.
 Bangkok, Thailand
 T: +66-2170-5900
info@mtl.miyachi.com

AMADA MIYACHI INDIA PVT., LTD.
 Bangalore, India
 T: +91-80-4092-1749
info@miyachiindia.com

AMADA MIYACHI AMERICA (Mexico Office)
 El Paso, Texas
 T: (915) 881-8765
mxsales@amadamiyachi.com

AMADA MIYACHI SHANGHAI CO., LTD.
 Shanghai, China
 T: +86-21-6448-6000
jwu@msc.miyachi.com

AMADA MIYACHI TAIWAN CO., LTD.
 Taipei, Taiwan
 T: +886-2-2585-0161

AMADA VIETNAM CO., LTD.
 Ha Noi, Vietnam
 T: +84-4-6261-4583

Specifications subject to change without notice. Copyright © 2018 AMADA MIYACHI AMERICA, INC. The material contained herein cannot be reproduced or used in any other way without the express written permission of AMADA MIYACHI AMERICA, INC. All rights reserved.



follow us on: